

HASLER



AH100PEIO Postal Scale May 2009 Rate Card Update

Dear Valued Hasler Customer,

Effective May 11, 2009, the United States Postal Service® will be changing their rates. Enclosed with this letter you will find a rate card, which when installed, will update your AH100PEIO Postal Scale to provide you with the latest supported USPS rates.

Please do not install the new rates until the effective rate change date in May. Installing the new rates is a simple process that should take less than five minutes. Before installing the new rates, review the enclosed installation instructions (steps 1 – 6). After the new rate card is installed, please return the old rate card in the prepaid, self-addressed padded envelope that arrived with this letter (step 7).

Please Note: It is the sole responsibility of the customer to install and verify that the rates are properly installed. Hasler will not be liable for rates that were not verified or installed properly.

Should you have any technical or administrative questions concerning this USPS rate change, you can:

- Visit www.haslerinc.com/rate for updated rate change developments.
- Visit our Knowledgebase Library at www.haslerinc.com/customers/custarea/kb.aspx for information related to your Hasler mailing system.
- Contact your authorized local Hasler representative. To obtain the contact information for your Hasler representative, please call 1.800.995.2035, or visit: www.haslerinc.com/company/dealerfind.aspx.

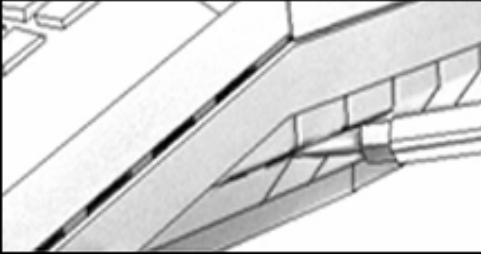
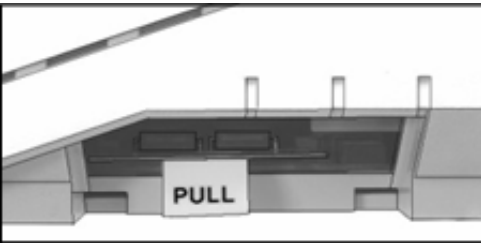
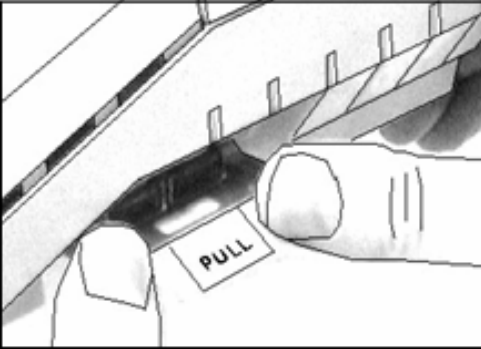
If you would like more information on the USPS rate change, please visit the USPS website at <http://www.usps.com/prices>.

We appreciate being your mailing system provider of choice and look forward to a long and rewarding business relationship.

Sincerely,

The Hasler Rate Change Team

AH100PEIO Postal Scale – Rate Card Installation Procedure: USPS May 2009

Step	Action	Figure
1	<p>Unplug the scale from both the meter and the power adapter.</p> <p>Note: If the Rate Card is removed from or installed in the scale with the power on, severe damage may occur to the scale.</p>	
2	<p>Remove the plastic cover from the right side of the scale console.</p> <ul style="list-style-type: none"> - Insert the tip of a flat screwdriver into the horizontal slot at the top of the cover. - Gently pry the cover toward you; the cover will drop down. 	
3	<p>Remove the Rate Card by:</p> <ul style="list-style-type: none"> - Pressing the black release button (the card should move slightly outward). - Pulling the white tab toward you until the card is completely out of the scale. 	
4	<p>Insert the new Rate Card by simultaneously pressing on both sides of the Rate Card while sliding it in. The Rate Card is designed to fit in only one direction.</p> <ul style="list-style-type: none"> - Ensure the white label is facing up and the card is inserted properly. - Close the cover. <p>EPROM software version: 46.7</p>	
5	<p>Reconnect the scale to both the meter and the power adapter.</p> <ul style="list-style-type: none"> - The scale will turn on automatically. - The 'Checking Memory' and 'Checking System' messages will be displayed. <p>The new rates have been successfully loaded.</p>	
6	<p>If the rate version has changed and the system prompts for an authorization number please enter the following number. If the system does not prompt you, go to step 7.</p> <p>'ENTER AUTHORIZATION NUMBER _____'</p> <p>Enter: 4, 4, 4, 4, 9, 6, 3, 2, 1, 0, 2, 5, 2, 2, 4, 6, 9, 8, 4, 0, and press ENTER.</p>	
7	<p>After the new Rate Card is installed, please return the old Rate Card in the prepaid, self-addressed padded envelope.</p>	