



## WJ135, WJ180, WJ215 – May 2009 USPS Rate Change – Loading Rates

To install the May 2009 USPS Rate Change on the WJ135, WJ180, WJ215:

1. Press the **LOCK** button.

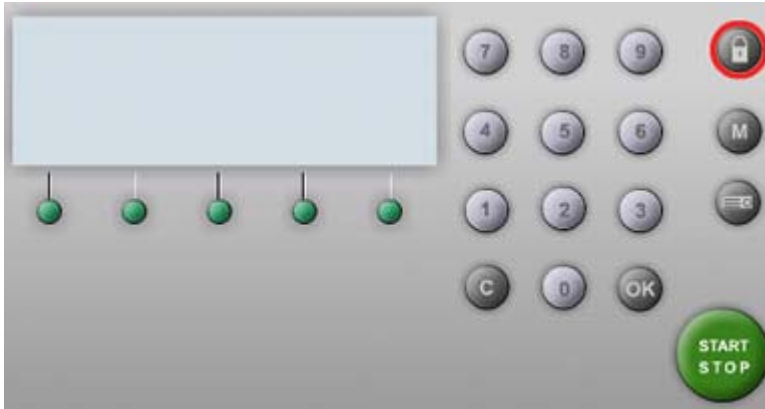


2. Press the button below **SUPERV**.

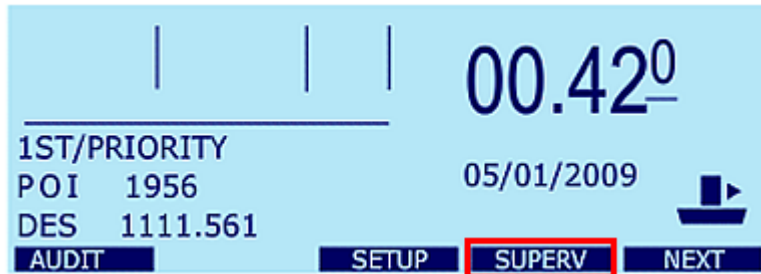

3. Enter the Supervisor Pin Number, **9430**. Press the **OK** button.



4. Press the button below **NEXT** until you see **SETUP**.

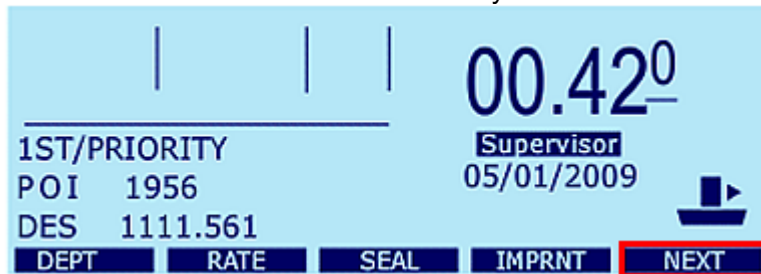


5. Press the button below **SETUP**.




**6. Using the down arrow, select Option 7, LOAD RATE.**

- Insert the rate card with the model number facing up into the slot on the side of the mailing machine.
- If the rate card is not inserted properly, the following error message will be displayed:  
**“E102 Waiting for memory card, insert and retry.”**
- Press the **OK** button.

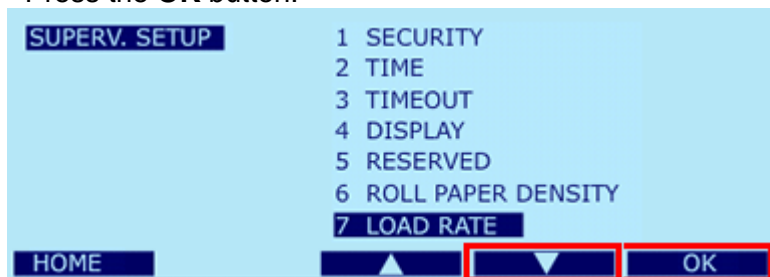


**7. Loading in progress** will be displayed.

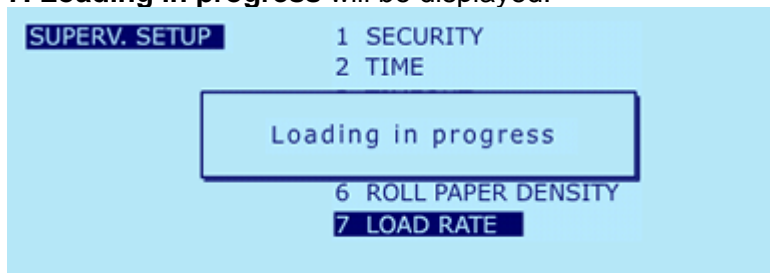

**8. Once the new rates have been loaded, Loading successful** will be displayed.


- Press the **OK** button.

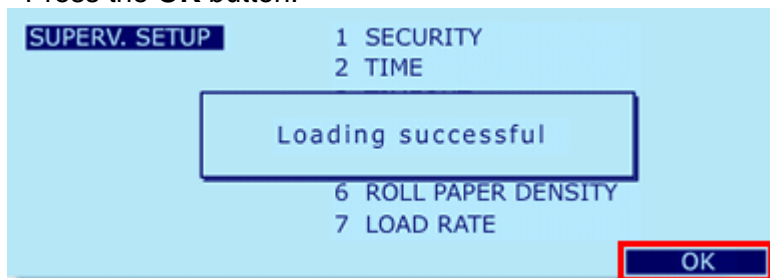

**9. Remove the rate card.**

- Press the **LOCK** button to return to the main screen.
- The new rates will not become active until the USPS effective date of May 11, 2009.

**10. On the effective rate change date, the screen will display:**

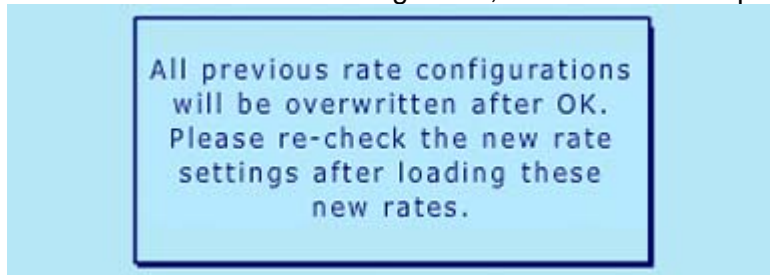

- Select **OK** after this statement. If you do not, the new rates will not become active.

**11. Load the new rates only once.**

- Loading the rates more than once will delete the current rates.
- If you have any questions, please wait until the rate change date to reload the rates.